

DHI-ASGG120T

Dahua Tripod Turnstile



Scene

It is suitable for use in factories, construction sites, scenic spots and more.

Technical Specification

System

Main Processor	Embedded Processor
----------------	--------------------

Basic

Product Type	Tripod turnstile
--------------	------------------

Casing Material	SUS304
-----------------	--------

Function

Online Update	Yes
---------------	-----

Performance

MCBF	3 million
------	-----------

Passing Speed	20–30 people/min
---------------	------------------

Cabinet Thickness	0.8 mm (0.03")
-------------------	----------------

Top Cover Thickness	1.2 mm (0.05")
---------------------	----------------

Barrier Material	Stainless steel
------------------	-----------------

Number of Face Module Installation Holes	0
--	---

Number of Access Controllers	1
------------------------------	---

- 304 stainless steel cabinet with a thickness of 0.8 mm.
- Automatically opens the barrier when the device is powered off.
- MCBF (Mean Cycles between Failures) is no less than 3 million times.
- Mechanical anti-tailing.
- Automatically closes barriers when no one enters the turnstile after the specified time.
- Supports configuring the passing time for people.
- Restores the system settings to their default values.
- Memorizes passing data for entry and exit.
- Features 9 modes for entry and exit including controlled, prohibited, and free. Combine these modes for more options.
- Supports being connected to multiple types of modules such as face, fingerprint and QR code. Combine these modules for more options.


General

Power Supply	100–240 V AC, 1.5A
Vandal-proof Rating	IK06, IK08
Protection	IPX4
Power Consumption	≤10 W (standby), ≤40 W (working)
Product Dimensions	1,200 mm × 220 mm × 980 mm (47.24" × 8.66" × 38.58") (L × W × H)
Packaging Dimensions	1,288 mm × 361 mm × 1,055 mm (50.71" × 14.21" × 41.54") (L × W × H)
Gross Weight	55.0±1.0kg
Operating Temperature	–25 °C to +70 °C (–13 °F to +158 °F)
Operating Humidity	5%–90% (RH), non-condensing
Operating Environment	Indoor; Outdoor
Storage Temperature	–25 °C to +70 °C (–13 °F to +158 °F)
Storage Humidity	5%–90% (RH), non-condensing

Ordering Information

Type	Model	Description
Tripod Turnstile	DHI-ASGG120T	Tripod turnstile, with two card reader boards

Dimensions (mm[inch])

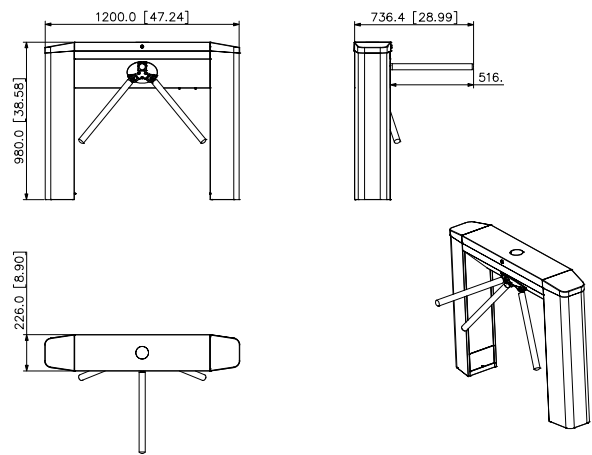

Application

